




6 Channel Wireless Transceiver

LobiBox launches its KSIG line of products with the 6-Channel Wireless Relay Boards. Addressable with up to 256 unique addresses, the receiver board has (6) Form C relay outputs rated up to 250 VAC 10 Amps and the transmitter accepts Dry Contact inputs and 3V-24VDC inputs.

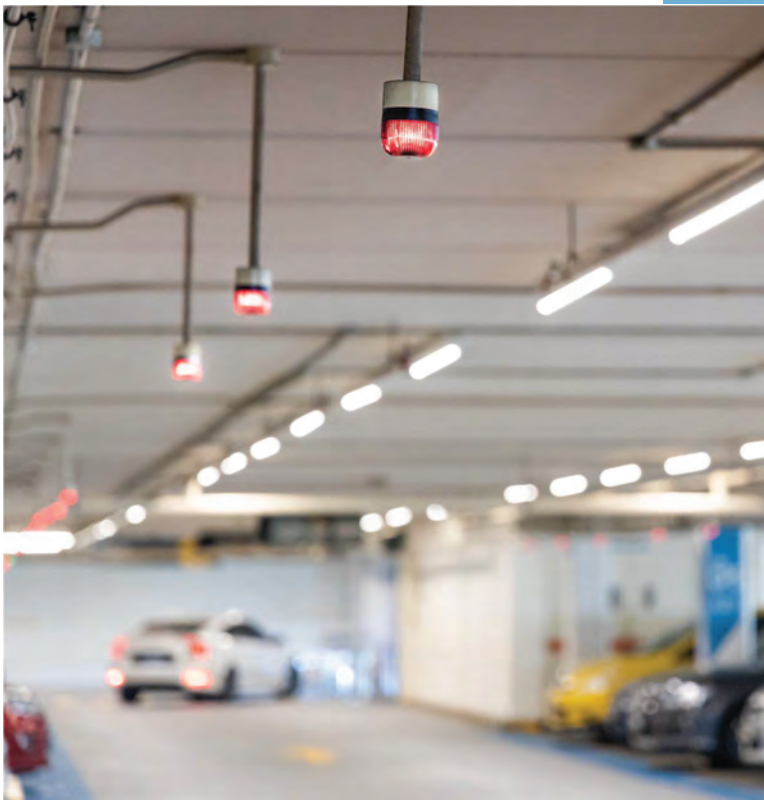

Transmitter

6 channel wireless relay receiver. Board has (6) Form C relay outputs rated up to 250VAC/28-VDC 10Amps.

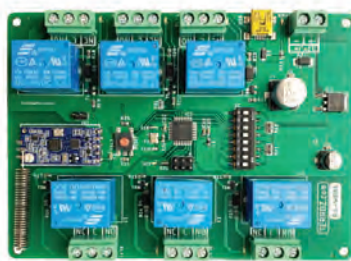

Receiver

6 channel wireless transmitter. Inputs have selectable Dry Contact or Voltage 3~24VDC Inputs.



Power In:


12VDC 1 Amp - Terminal Block
5VDC 1 Amp - USB Mini B Connection

Frequency & Range



433 MHz
Reaches 500m line of sight or 200 ft indoors

APPLICATIONS



- Monitoring Alarm Points
- Monitoring Power Sources
- Monitoring Equipment Status
- Controlling Signs & Alerts
- Controlling Parking Equipment
- Activating Machines Remotely

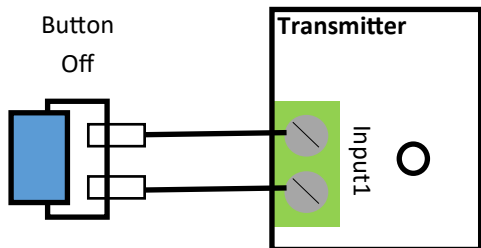



OFF = OFF

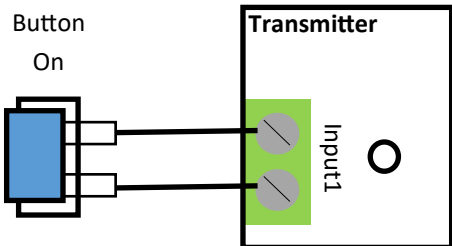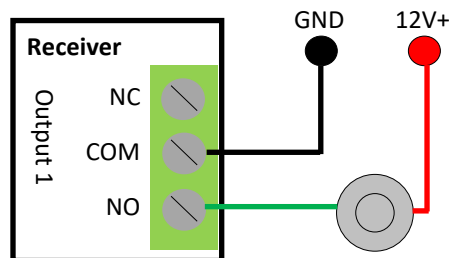



ON = ON

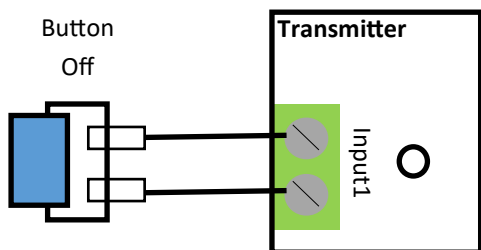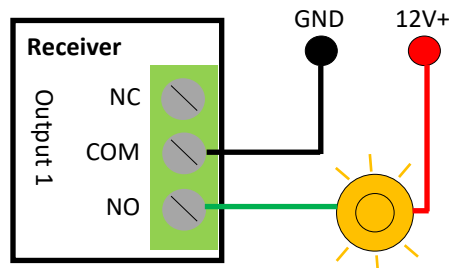



OFF = ON

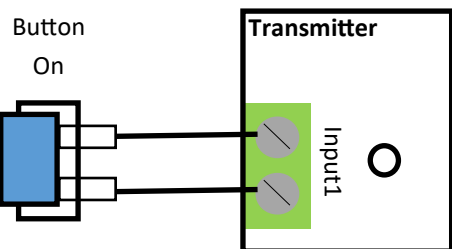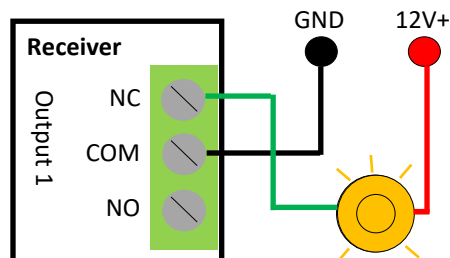

ON = OFF

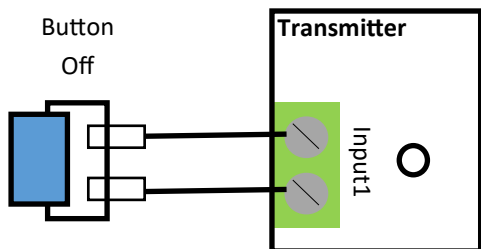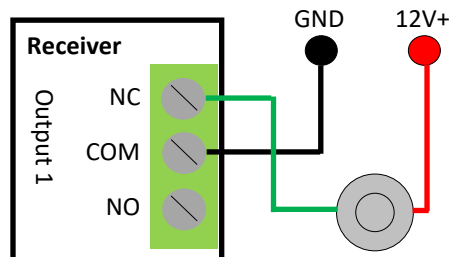

FLIP-FLOP

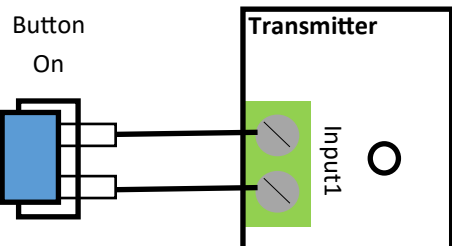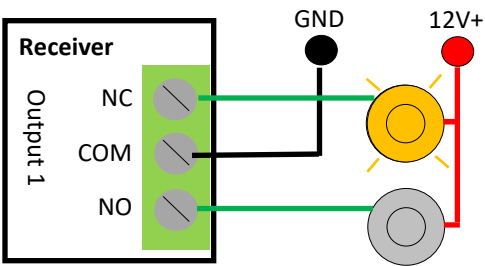

CIRCUIT

